




Whirlpool Model: WRFC2036RZ

Whirlpool® Counter-Depth French Door Bottom Mount Refrigerator

Color  Fingerprint Resistant Stainless Steel

Product Description

This French Door refrigerator with an internal water dispenser gives you the storage you need with the flexibility you want. With features like an Elevated Deli Drawer, spend less time looking and more time enjoying your deli essentials. The Interior Water Dispenser with Whirlpool® Water Filtration offers on-demand filtration so even clean water is easy to find. Get that perfect built-in look while keeping everyday items in sight thanks to Counter Depth Design with Easy-Reach Shelves.

Specifications


Filter Details

Air Filter Indicator/Reset	No
Fresh Flow Air Filter	No
Produce Preserver	Yes
Water Filter Location	Interior
Water Filter Indicator/Reset	Yes
Water Filter Part Number	EDR4RXD1

Dimensions

Cabinet Width	35-5/8
Depth	29-3/8
Depth Closed Excluding	26-7/8
Depth Closed Including	29-3/8
Depth Excluding Doors	24-1/8
Freezer Capacity Volume	5.62
Gross Weight	272
Height	70-1/8
Height To Top Of Cabinet	68-7/8
Height To Top Of Door Hinge	70-1/8
Net Weight	271
Refrigerator Capacity	14-19/50
Total Refrigerator Capacity	20
Width	35-5/8

Certifications

ADA Compliant	No
CEE Tier Rating	Tier I
UL	Yes
ULe Environmentally	Passed 60 point AHAM
Prop 65	 CALIFORNIA RESIDENTS ONLY - WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
Energy Star® Qualified	ENERGY STAR® Qualified

Smart Compatibility

Connectivity	No
Works With	No

Exterior Details

Cabinet Finish	Textured
Counter Depth	Yes
Door Style	Contour
Hidden Hinge	Yes
Reversible Door	No

Controls

Automatic Defrost	Yes
Control Location	Interior Up Front
Control Lockout	No
Cooling Type	Single Evaporator
Door Ajar/Open Alarm	Yes
LCD Touch Screen	No
Max Cool/Fast Cool	Yes

Dimensions

Gross Weight	0.000
--------------	-------

Details

Installation Configuration	Freestanding
Refrigeration Configuration	Refrigerator
Refrigerator Type	French Door

Icemaker Details

Icemaker	Factory Installed
Icemaker Location	Freezer
Types of Ice	Cubed



5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

YWFE515S0JS

Available Finishes/Colours

 YWFE515S0JB
Black

 YWFE515S0JW
White

 YWFE515S0JS
Stainless Steel

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

Top Features

FlexHeat™ Dual Radiant Element

Frozen Bake™ technology

Keep Warm setting

Manuals & Literature:



[Installation Guide](#)



[Use and Care Guide](#)



[Warranty Information](#)

Dimensions

Depth	27 3/4
Height	36
Width	29 7/8

Configuration and Overview

Range Type	Freestanding
Fuel Type	Electric
Size (IN, inches)	30

Exterior

Door Removable	Yes
Drawer Type	Storage Drawer
Oven Door	Glass Window
Oven Window Size	Extra Large
Handle Color	Stainless Steel
Handle Material	Metal
Handle Type	Reach-Through Handle

Features

Hot Surface Indicator Light	Yes
-----------------------------	-----

Features

Heating Element On Indicator Light	Yes
Power On Indicator Light	No
Griddle	NA
Automatic Convection Conversion Temperature Adjust	No
Power Outage Compatible	No

Oven Details

Door Removable	Yes
Drawer Type	Storage Drawer
Power On Indicator Light	No
Automatic Convection Conversion Temperature Adjust	No
Automatic Shut-Off	No



Whirlpool® Quiet Dishwasher with Boost Cycle

WDF341PAPM

Available Finishes/Colours

WDF341PAPM
Stainless Steel

WDF341PAPB
Black

WDF341PAPW
White

Clean dishes with a 57 dBA quiet dishwasher. A Boost Cycle provides extra effort for stubborn messes while an Extended Dry Option elevates drying performance. This fast dishwasher includes a Quick Wash Cycle that cleans dishes quickly and a Triple Filtration Wash System that filters food particles and cleans the water between wash stages.

Top Features
57 dBA
Heavy cycle
Boost Cycle

Manuals & Literature:

-  [Dimension Guide](#)
-  [Energy Guide](#)
-  [Installation Guide](#)
-  [Owner Manual](#)
-  [Warranty Information](#)

Dimensions		Specifications	
Depth	24.5	Required Accessories	W10685193
Height	33.5	Cycles and Options	
Width	23.88		
Compatibility		Dishwasher Cycle Selections	Heavy; Normal; Quick Wash; Boost
Connectivity	No	Cycles	
Controls		Number Of Wash Cycles	4
Automatic Temperature Controls	Yes	Details	
Control Location	Front	Drying System Type	Recessed Heating Element
Control Type	Electronic	Hoses Included	Drain Hose
End Of Cycle Signal	Yes	Interior Light	No
Last Cycle Recall	Yes	Number Of Racks	2
Status Light	Yes, Blue	Number Of Washarms	2
Specifications		Rack Material	PVC
Country Of Origin	USA	Tub Material	Plastic
Quick Wash	Yes	Tub Style	Built-in Tall Tub 24in.
Optional Accessories	W11365014		

Whirlpool® 1.6 cu. ft. Sensor Cooking Microwave

YWMCS7022RZ

Available Finishes/Colours

YWMCS7022RB
Black

YWMCS7022RZ
FingerPrint Resistant
Stainless Steel




YWMCS7022RS
Stainless Steel



This 1,100-watt microwave has convenient features like a Dishwasher-Safe Turntable Plate to make cleanup even easier, and 6 Auto Functions so you can reheat, cook and defrost various dishes at the touch of a button. With 1.6 Cu. Ft. Capacity and 7 Express Buttons, this Sensor Cooking microwave removes the guesswork and gives just the right amount of heat and time.

Top Features

Manuals & Literature:

-  [Dimension Guide](#)
-  [Owners Manual](#)
-  [Warranty Information](#)

Dimensions		Features	
Depth	18.31	Clock	Yes
Height	12.25	Convenience Cooking Controls	Yes
Width	21.75	Fan Speed Indicator	No
Compatibility		Number Of Power Levels	10
Connectivity		Sensor Cooking	Yes
Works With		Configuration	
Controls		Microwave Configuration	Countertop
Control Location	Right	Microwave Details	
Control Type	Electronic Touch	Cavity Finish	Powder Coat
Display Color	White	Convection	No
Electrical		Cooking Power Watts	1,100
Amps	15	Grill	No
Volts	120	Interior Depth	17.63
Hz	60	Interior Height	10.38
Watts	1	Interior Light	Incandescent
Exterior		Interior Width	14.75
Handle Color	No Handle	Features	
Door Opening	Left Swing	Night Light	No
Door Release	Push Button		

MICROWAVE OVEN BUILT-IN TRIM KIT INSTALLATION INSTRUCTIONS

Built-In Trim Kit Models MTK1527, MTK1530

UL listed for use over any electric built-in oven, up to 30" (76.2 cm) wide

INSTRUCTIONS D'INSTALLATION GARNITURE ENCASTRÉE POUR FOUR À MICRO-ONDES

Garniture encastrée pour modèles MTK1527, MTK1530

Homologation UL pour utilisation au-dessus de tous les fours encastrés électriques, jusqu'à 30" (76,2 cm) de largeur

Table of Contents / Table des matières

MICROWAVE OVEN SAFETY	1	SÉCURITÉ DU FOUR À MICRO-ONDES	7
INSTALLATION INSTRUCTIONS	2	INSTRUCTIONS D'INSTALLATION	7
Tools and Parts	2	Outillage et pièces	7
Location Requirements.....	2	Exigences d'emplacement.....	7
Required Cutout Dimensions.....	2	Dimensions nécessaires de l'ouverture d'encastrement.....	8
Trim Kit Frame Dimensions	2	Dimensions du cadre de la trousse de garniture.....	8
Electrical Requirements.....	3	Spécifications électriques	8
Prepare Microwave Oven	3	Préparation du four à micro-ondes	9
Prepare Cutout/Cabinet Opening	4	Préparation de l'ouverture d'encastrement/dans le placard	10
Install the Microwave Oven.....	5	Installation du four à micro-ondes	11
Install Trim Kit Frame	6	Installation du cadre de garniture.....	12

MICROWAVE OVEN SAFETY

Your safety and the safety of others are very important.

We have provided many important safety messages in this manual and on your appliance. Always read and obey all safety messages.



This is the safety alert symbol.

This symbol alerts you to potential hazards that can kill or hurt you and others.

All safety messages will follow the safety alert symbol and either the word "DANGER" or "WARNING."

These words mean:

⚠ DANGER

You can be killed or seriously injured if you don't immediately follow instructions.

⚠ WARNING

You can be killed or seriously injured if you don't follow instructions.

All safety messages will tell you what the potential hazard is, tell you how to reduce the chance of injury, and tell you what can happen if the instructions are not followed.

INSTALLATION INSTRUCTIONS


Tools and Parts

Tools Needed

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

- Measuring tape
- Drill
- Pencil
- 7/64" drill bit
- Phillips screwdriver

Parts Supplied (not shown to scale)

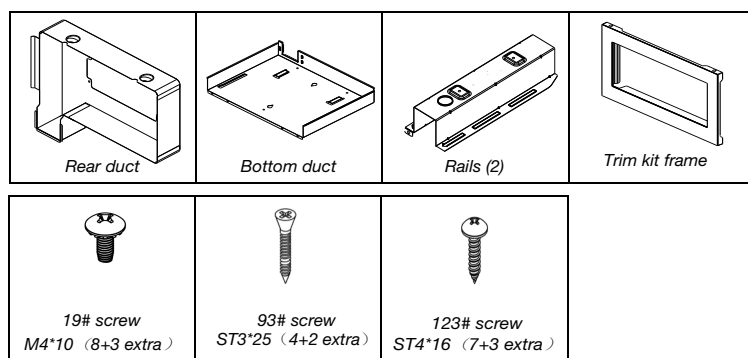


Location Requirements

The microwave oven may be installed over a built-in oven. If installing over a built-in oven, make sure there is a minimum of 3¹⁵/₁₆" (10cm) between the top of the lower oven cutout and the microwave oven cutout floor.

The microwave oven may also be installed in a cabinet by itself (without a built-in oven below). For best usability, we recommend a minimum distance of 36¹/₁₆" (91.6 cm) from the floor to the cutout floor.


Make sure the surrounding cabinetry has clearance to open and close freely. Allow a clearance of at least 2" (5 cm) below the cutout floor (3¹⁵/₁₆" [10 cm] for installation above a built-in oven), and a clearance of at least 2" (5 cm) above the cutout opening.

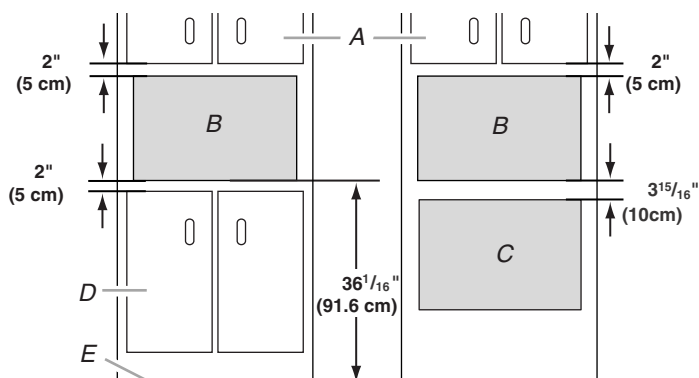

A. Upper cabinet
B. Microwave oven cutout
C. Lower oven cutout
D. Lower cabinets
E. Floor

Required Cutout Dimensions

For minimum depth requirements, see chart.

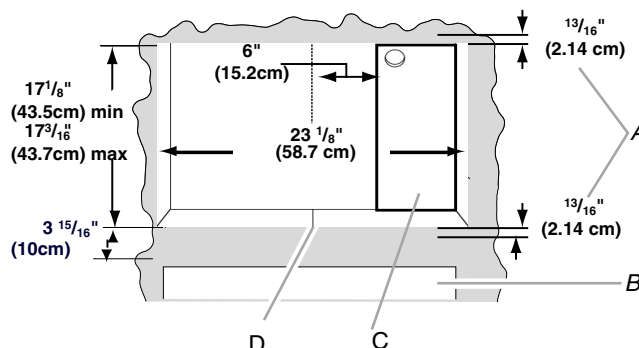


A. Trim kit frame overhang
B. Cutout for lower oven
C. Recommended region for receptacle location (no less than 6" [15.2 cm] to the right of cutout centerline)
D. Cutout centerline

Receptacle Location Minimum Depth

Within recommended region	21 ⁹ / ₁₆ " (54.8 cm) with flush receptacle; 23 ⁹ / ₁₆ " (59.8cm) with non-flush receptacle
Outside recommended region	23 ⁹ / ₁₆ " (59.8 cm) with flush receptacle; 25 ⁹ / ₁₆ " (64.9 cm) with non-flush receptacle

NOTES:

- Depth requirements depend upon receptacle and its location within or outside of recommended region. See illustration and chart above.
- Height dimension is critical: 17 ¹/₈" (43.5 cm) minimum, 17 ³/₁₆" (43.7 cm) minimum.
- Width measurement has ±1/16" (2 mm) tolerance.
- 3¹⁵/₁₆" (10 cm) minimum dimension is from lower oven cutout ceiling to microwave oven cutout floor.
- Trim kit frame extends ¹³/₁₆" (2.14 cm) above and below the cutout opening.

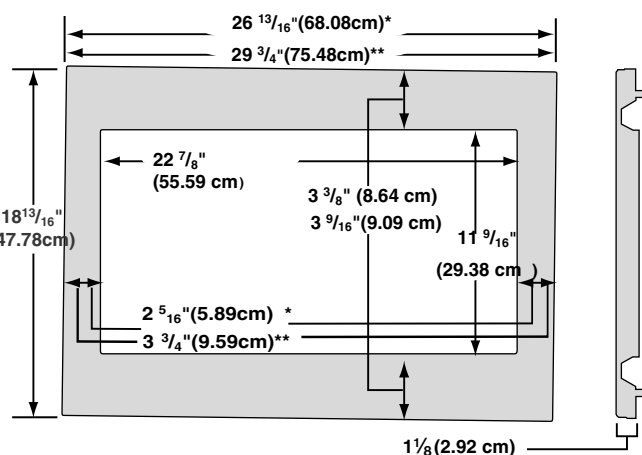

*27" (68.6 cm) trim kit

**30" (76.2 cm) trim kit

Volterra


Wallmount hood

Specification sheet



Learn
more

MEASUREMENTS

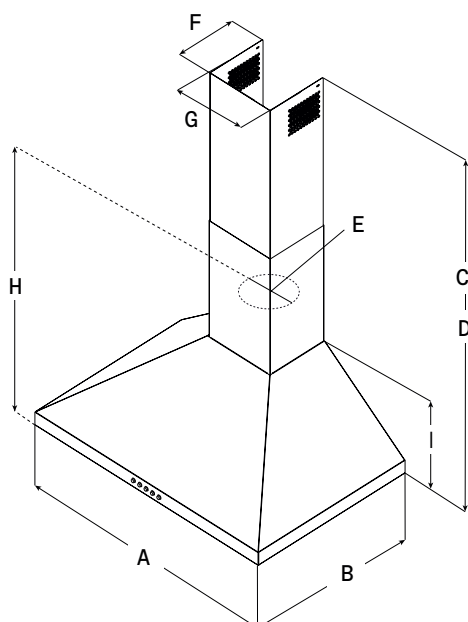

	EVL424SS	EVL430S2	EVL436S2
A	23 5/8" (60 cm)	30" (76.2 cm)	36" (91.4 cm)
B	19 1/16" (50 cm)		
C*	Min: 28 3/8" (72 cm) Max: 42 1/8" (107 cm)		
D**	Min: 28 3/8" (72 cm) Max: 38 3/16" (97 cm)		
E	6" (15.2 cm)		
F	7 3/16" (18.3 cm)		
G	8 3/16" (20.8 cm)		
H	14 5/8" (37.1 cm)		
I	10 1/4" (26 cm)		

*Ductless (recirculating)
** Ducted version


DESCRIPTION

Volterra, with its pyramid shaped angles and stainless steel finish, makes a striking visual statement to any kitchen. Available in 24" width, Volterra features backlit push button controls, LED lighting and 3-speed blower. It also features a telescopic chimney for up to 9'2" ceilings.

Designed for standard ducted installation Volterra can also be installed as a recirculating system using the kit available as an accessory.



FEATURES

-  3x layer mesh
-  Led light



GENERAL PROPERTIES

Width	24"	30"	36"
Model	EVL424SS	EVL430S2	EVL436S2
Dimensions	23 ⁵ / ₈ "W x 19 ¹ / ₁₆ "D x min:28 ³ / ₈ "max:42 ¹ / ₈ "H	30"W x 19 ¹ / ₁₆ "D x min:28 ³ / ₈ "max:42 ¹ / ₈ "H	36"W x 19 ¹ / ₁₆ "D x min:28 ³ / ₈ "max:42 ¹ / ₈ "H
Blower Type ¹ (Internal)	400 CFM (3-speed)		
Noise (Min-max sones) ¹	0.4-5.9 Sones		
Electrical	120V-60Hz,265W		
Illumination	2 LED, 2.1W, 3000K, 235 Lumen		
Finish	Stainless Steel		
Controls	Backlit electronic push buttons		
Grease filters	Dishwasher-Safe, Anodized aluminum mesh filter (2 for 30" & 3 for 36")		
Installation type	Ducted or recirculating with kit (sold separately)		
Duct transition	6" round with backdraft damper (Top Only)		
Telescopic chimney	Can reach ceiling heights for heights 7'5"-9'2" (ducted),7'5"-9'6" (recirculating)		

KITS

Chimney extension	KIT02762 (Reaches ceiling heights of 8'15"-11'3" (ducted), 8'6"-11'7" (recirculating))
Recirculating kit	KIT02766 (contains 6" deflector and 2 round carbon filters)
CFM Reduction	KIT0175561 (achieves 280 CFM)
Upgrade filter	GF04YB (Stainless steel microhole filter + contains 1 filter)

WARRANTY:² Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com



The product images shown are for illustration purposes only and may not be an exact representation of the product.
¹ CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

² For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.