


**DALS
LIGHTING**
Canada
80, de la Seigneurie blvd., E.
Blainville, Quebec J7C 4N1


U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065

877.430.1818
info@dals.com
dals.com

MODEL **5004-CC**
NAME **EXCEL**
4-Inch Round Recessed Panel Light


Our new LED Panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.

PROJECT:
DATE:
NOTES:
TYPE:
QTY:

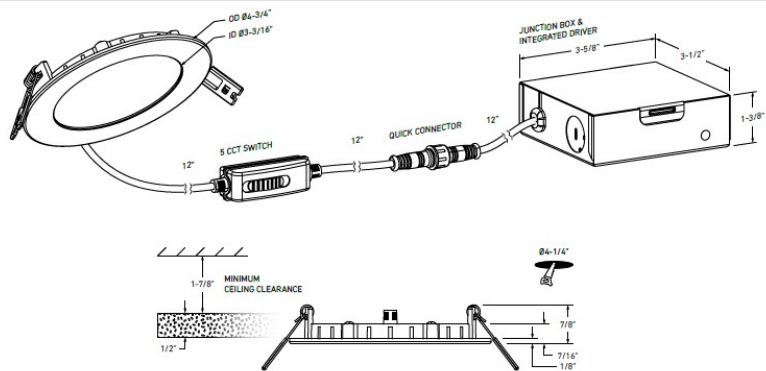995 Milt Stegall Drive
Winnipeg MB R3G 3H7
Alison Demare
alisond@robinsonlighting.com
204-784-0099

QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	FINISH
4"	11W	770lm	2700K	80	120V	110°	☒ White ☐ ☐ Satin Nickel ☐ ☐ Black ☐
			3000K				
			3500K				
			4000K				
			5000K				

*Lumen output measured at 3000K

LIGHT DISTRIBUTION

CONSTRUCTION
Lens
Frosted

Type of optics
Flat lens

Type of LED
Edge-lit SMD

Lens material
Acrylic

Housing material
Cast aluminum

Cut hole size
4-1/4"

RATINGS
Placement
Indoor/Outdoor

Lifespan
35,000 hrs.

FT rating
FT4

Location
Wet

Certifications
ETL, FCC, ICES, ES
IC, ASTM E283-04, T24

Operating temperature
-20° to 40° C

WHAT'S IN THE BOX

LED recessed fixture
Junction box
Push-in wire connectors
Mounting hardware
Instruction sheet

ACCESSORIES
RFP-UNI
Universal Drilling
Plate

RFP-46
Drilling Plate

REC-PT4-BK
Panel Trim in Black

REC-PT4-BB
Panel Trim in
Brushed Brass

REC-PT4-SN
Panel Trim in
Satin Nickel

ADAPTERS
REC-EXT108
108" extension cord for
recessed fixtures

REC-EXT230
230" extension cord for
recessed fixtures



Prepared For:

Type: Suite Showers Page 2 of 2

Job Name:

Quantity:



Canada
80, de la Seigneurie blvd., E.
Blainville, Quebec J7C 4N1

U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065

877.430.1818
info@dals.com
dals.com

**ELECTRICAL
DETAILS****Input voltage**
108-132V**Output current**
250mA**Power factor**
98%**Driver type**
Constant current**Output voltage**
30-46V**LED model #**
2835**THD harmonic
distortion**
<30%**Binning type**
3 SDCM**FEATURES**Every fixture includes
a junction box with an
integrated driverSuperior LED
performance and
lifespan

Minimal heat emission

Very low profile

Frosted lens

Switch-selectable CCT:
2700K/ 3000 K/ 3500 K/
4000 K/ 5000 K

Can be daisy chained

Smooth 360° wide
spread

Edge lit technology

WARRANTY

DALS offers a 5-year warranty from the date of purchase which
covers repairs or replacement of defective parts of the housing,
optics, and electronics. To contact DALS customer service call
1-877-430-1818 or send an e-mail to info@dals.com.



995 Milt Stegall Drive
Winnipeg MB R3G 3H7
Alison Demare
alisond@robinsonlighting.com
204-784-0099

RECOMMENDED DIMMER LIST*

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)	MAX LOAD
Dals	SM-DIMSW Smart Dimmer	Triac, 250W LED/CFL	Compatible	Min: 7 / Max: 100	22
Lutron	DVCL-153PR-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 6 / Max: 100	13
Lutron	CTCL-153PDH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 5 / Max: 100	13
Lutron	STCL-153PH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 1 / Max: 100	13
Lutron	DVWCL-153PH-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 5 / Max: 100	13
Lutron	MACL-153MRHW-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 1 / Max: 100	13
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	Min: 10 / Max: 100	27
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	Min: 2 / Max: 100	22
Lutron	Caseta PD-6WCL-WH-R-C	Triac, 300W Dimmable CFL/LED	Compatible	Min: 1 / Max: 100	27
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	Min: 4 / Max: 100	22
Lutron	Caseta PD-10NXD-WH	Triac, LED—up to 250 W	Compatible	Min: 1 / Max: 100	22
Leviton	6672-1LW	Triac, 150W Dimmable CFL/LED	Compatible	Min: 17 / Max: 100	13
Leviton	DSM10	Triac, 450W Dimmable CFL/LED	Compatible	Min: 17 / Max: 100	40
Leviton	6674	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 11 / Max: 100	13
Leviton	IPL06-10Z	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 18 / Max: 100	13
Leviton	DSL06-752	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 17 / Max: 100	13
Leviton	D26HD-742-1RW	Triac, 300W LED/CFL	Compatible	Min: 10 / Max: 100	27
Legrand	RHCL453PNICCV4	Triac, 450W Dimmable CFL/LED	Compatible	Min: 11 / Max: 100	40
Legrand	ADTP703TUM4	Triac, 450W Dimmable CFL/LED	Compatible	Min: 17 / Max: 100	40
Legrand	ADPD453LM2	Triac, 450W Dimmable CFL/LED	Compatible	Min: 38 / Max: 100	40
Legrand	RHL373PW	Triac, 250W LED	Compatible	Min: 6 / Max: 100	22
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	Min: 2 / Max: 100	10
Control 4	C4-FPD120-WH	Triac, 200W LED	Compatible	Min: 2 / Max: 100	18



Prepared For:

Job Name:

Type: Suite Vanities

Quantity:



TEL 905.695.2055


FAX 905.695.2056

toll free 1.800.660.5391

toll free 1.800.660.5390

33 West Beaver Creek Road Richmond Hill, Ontario Canada L4B 1L8

24" SQUARE 5CCT WALL MOUNT

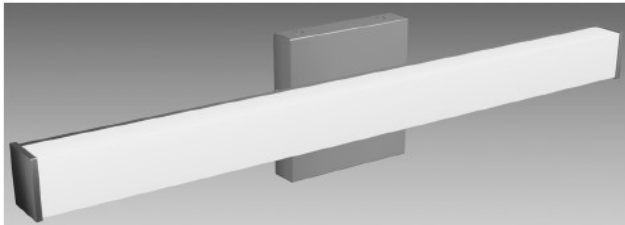

2700K . 3000K . 3500K . 4000K . 5000K

OPTIONS AVAILABLE

ITEM NO.	FINISH
EF-WS024-014-BN	BRUSH NICKEL
EF-WS024-014-BK	BLACK
EF-WS024-014-CHR	CHROME

PRODUCT DETAILS


No.	:	EF-WS024-014
Product Color	:	BRUSH NICKEL BLACK OR CHROME
Product Material	:	ALUMINUM
Shade / Accent Colour	:	WHITE
Shade / Accent Material	:	ACRYLIC
Size (W x D)	:	1.5" x 1.5"
Length	:	24.0"
Ext	:	2.5"
Weight	:	2.7lbs

LIGHT SOURCE DETAILS

Light Source Type	:	AC LED
Input Voltage	:	120V
Total Wattage	:	24W
Delivered Lumens	:	UP to 1700lm5CCT
Kelvin	:	(2700/3000/3500/4000/5000K)
CRI	:	90+
Dimmable	:	TRIAC

TECHNICAL DETAILS

Light Direction	:	180°
Canopy / Backplate Length	:	5.00"
Canopy / Backplate Height	:	1.00"
Canopy / Backplate Width	:	5.00"
Mounting	:	WALL
Location	:	DAMP
Approval	:	

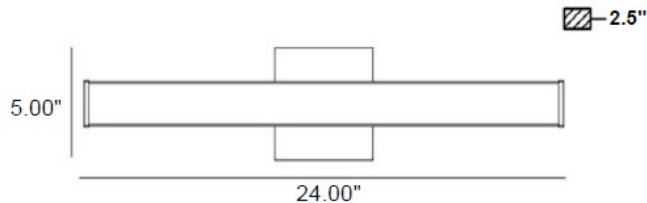

995 Milt Stegall Drive
Winnipeg MB R3G 3H7
Alison Demare
alisond@robinsonlighting.com
204-784-0099



Prepared For:

Job Name:

Type: Suite Master Bedrooms

Quantity:


DALTON FM7916 FLUSH MOUNT

PROJECT



DESCRIPTION



An organza or textured linen band surrounds a concentric polymeric diffuser spreading even light from the LED source. Finely hand-tailored, the fabric shade contributes a soft sophistication to the modern interior. Applicable as a flush mount, pendant and in numerous sizes and fabric colors to suit your context.

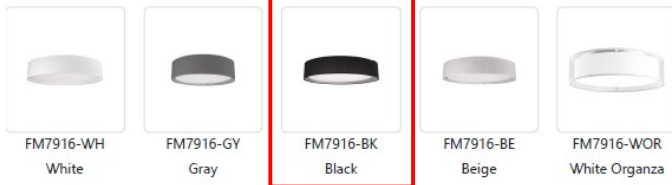

FM7916-BOR
Black Organza

Organza Fabric
BOR - Black Organza
WOR - White Organza

Textured Linen Fabric
BK - Black
BE - Beige
GY - Gray
WH - White

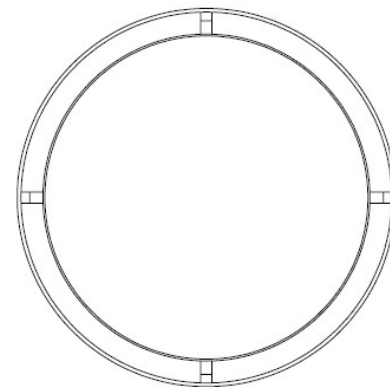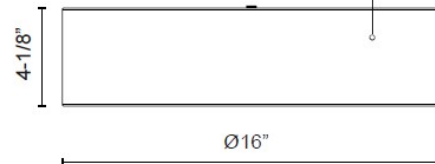

SPECIFICATION DETAILS

* For custom options, consult factory for details.

Fixture Dimensions	D16" x H4-1/8"
Light Source	AC LED Module
Wattage	26W
Total Lumens	2125lm
Delivered Lumens	BOR-1050lm; WOR-1432lm;
Voltage	120V
Color Temperature	3000K
CRI (Ra)	90CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	100% - 10%, ELV Dimmer (Not Included)
Diffuser Details	White Acrylic Diffuser
Shade Details	Organza Shade; Textured Linen Shade;
Location	Dry
Compliance	T24-JA8
Warranty	5 Years
CEC Title 24 JA8	Yes, JA8-19
Energy Star Certified	Energy Star Compliant - Black Organza, Beige, Black, Gray, White



995 Milt Stegall Drive
Winnipeg MB R3G 3H7
Alison Demare
alisond@robinsonlighting.com
204-784-0099



Prepared For:

Job Name:

Type: Suite Islands

Quantity:

MAXILITE

Pendant, 1 Light with Cylinder Clear Glass in Black Finish

Part Number: MX 2420-07

Finish: Black

Glass: Clear

Dimensions: W3.5" X H10"

Max Dimensions: W4.75" X H90"

Wattage: 60

Dimmable: Yes

Location: Dry Rated

Warranty: 1 Year Limited

Bulbs Included: None

Bulbs Required: 1 X 60 Watt A19

Certification: c-CSA-us or Equivalent

Voltage: 120



NOTE: Image may not reflect selected features.



995 Milt Stegall Drive
Winnipeg MB R3G 3H7
Alison Demare
alisond@robinsonlighting.com
204-784-0099



Prepared For:

Job Name:

Type: Suite Kitchen Undercabinets

12-inch Page 1 of 2

Quantity:

STANPRO

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LED SWIVEL LED UNDERCABINET LUMINAIRE 3 CCT AND 2 POWER SELECTABLE



995 Milt Stegall Drive
Winnipeg MB R3G 3H7
Alison Demare
alisond@robinsonlighting.com
204-784-0099

ORDERING INFORMATION

Order code: 6/194
Model number: UCS/12IN/120V/5W/SEL/FR/WH/STD
UPC: 0695496/1942
Case quantity: 10

PHYSICAL DATA

Dimensions: 12" (305 mm)
Lens Type: Frosted Polycarbonate
Housing Material: Aluminum
Housing Finish: White
Mounting: Surface
Daisy Chain: 60 units (300 W) can be installed in row

PERFORMANCE DATA

Watts (W): 2.5/5
Volts (VAC): 120
Colour temp. (K)¹: 2 700/3 000/4 000
Lumen output (lm)²: 195/359
Lumen per Watts (lm/W): 60
CRI: 90
Life L70 (h)³: 50 000
Beam angle (°): 102
THD (%): 15
Power factor: >0.90
Dimming: Forward and Reverse
Operating temp. range: -20° C to 40° C (-4 °F to 104 °F)

¹ Typical colour temperature range: ±1-5 %

² Lumen values are based on 3 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

LUMEN SPECIFICATION TABLE

Model number	Watts (W)	2 700 K		3 000 K		4 000 K	
		Lumen (lm)	Efficiency (lm/W)	Lumen (lm)	Efficiency (lm/W)	Lumen (lm)	Efficiency (lm/W)
UCS/12IN/120V/5W/SEL/FR/WH/STD	2.5	187	75	195	78	204	82
	5	340	68	359	72	372	74

Default programming: 3 000 K

COMPATIBLE ACCESSORIES (order separately)

Order code	Description	Type	Length in (mm)	Case qty(master)
67202	UCS/PLUG/120V/STD	120 V Power Cord Plug	73 5/8 (1 870)	100
67203	UCS/JUMPER/6IN/STD	6" Jumper	6 (152.5)	500
67204	UCS/JUMPER/24IN/STD	24" Jumper	24 (610)	250
67205	UCS/JUMPER/36IN/STD	36" Jumper	36 (914)	100
67787	UC/HARDWIREBOX/120V/STD	Hardwire Box	6.5 (165)	50



5 ans
garantie

quick
ship

dimmmable
fixture

damp
location

ICES
005

3
CCT TCC
2 700/3 000/4 000 K

power
selectable

Intertek

FC

ENERGY STAR



Prepared For:

Job Name:

Type:

Quantity:

STANPRO**LED SWIVEL - 67194****COMPATIBLE DIMMERS**



Brand	Model
LEGRAND	PD-5NE
LUTRON	DVCL-153P, MACL-153P
LEVITON	IPL06, IPE04-1LZ

NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.

Dimming range: 5%-100%



995 Milt Stegall Drive
Winnipeg MB R3G 3H7
Alison Demare
alisond@robinsonlighting.com
204-784-0099

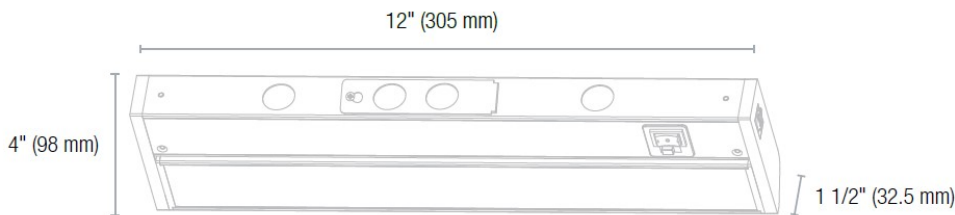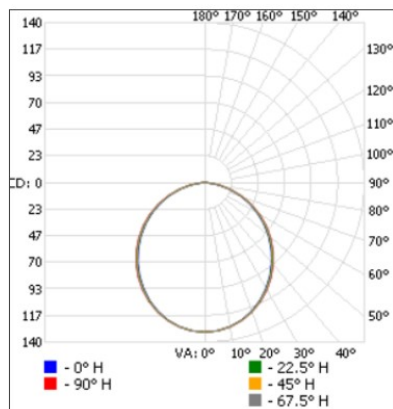DIMENSIONS**PHOTOMETRIC DATA¹****67194 • UCS/12IN/120V/5W/SEL/FR/WH/STD • 5 W • 358.7 lm****Polar candela distribution****Zonal lumen summary**

Zone	Lumens	% Fixture
0-30	100.4	28
0-40	163.3	45.5
0-60	285.4	79.6
60-90	73.3	20.4
0-90	358.7	100

Illuminance at a distance

Center beam fc		Beam width	
1.7'	45.3	4.6'	4.9'
3.3'	12.0	9.0'	9.5'
5.0'	5.24	13.7'	14.4'
6.7'	2.92	18.3'	19.3'
8.3'	1.90	22.7'	23.9'
10.0'	1.31	27.3'	28.7'

Vert. spread: 107.6°
Horiz. spread: 110.3°

¹ Complete IES files available on our website.

STANPRO

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LED SWIVEL LED UNDERCABINET LUMINAIRE 3 CCT AND 2 POWER SELECTABLE



995 Milt Stegall Drive
Winnipeg MB R3G 3H7
Alison Demare
alisond@robinsonlighting.com
204-784-0099

ORDERING INFORMATION

Order code: 67196
Model number: UCS/24IN/120V/12W/SEL/FR/WH/STD
UPC: 069549671966
Case quantity: 10

PHYSICAL DATA

Dimensions: 24" (610 mm)
Lens Type: Frosted Polycarbonate
Housing Material: Aluminum
Housing Finish: White
Mounting: Surface
Daisy Chain: 25 units (300 W) can be installed in row

PERFORMANCE DATA

Watts (W): 6/12
Volts (VAC): 120
Colour temp. (K)¹: 2 700/3 000/4 000
Lumen output (lm)²: 508/906
Lumen per Watts (lm/W): 67
CRI: 90
Life L70 (h)³: 50 000
Beam angle (°): 104
THD (%): 15
Power factor: >0.90
Dimming: Forward and Reverse
Operating temp. range: -20° C to 40° C (-4 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are based on 3 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

LUMEN SPECIFICATION TABLE


Model number	Watts (W)	2 700 K		3 000 K		4 000 K	
		Lumen (lm)	Efficiency (lm/W)	Lumen (lm)	Efficiency (lm/W)	Lumen (lm)	Efficiency (lm/W)
UCS/24IN/120V/12W/SEL/FR/WH/STD	6	531	89	508	85	583	97
	12	937	78	906	76	1029	86

Default programming: 3 000 K

COMPATIBLE ACCESSORIES (order separately)

Order code	Description	Type	Length in (mm)	Case qty(master)
67202	UCS/PLUG/120V/STD	120 V Power Cord Plug	73 5/8 (1 870)	100
67203	UCS/JUMPER/6IN/STD	6" Jumper	6 (152.5)	500
67204	UCS/JUMPER/24IN/STD	24" Jumper	24 (610)	250
67205	UCS/JUMPER/36IN/STD	36" Jumper	36 (914)	100
67787	UC/HARDWIREBOX/120V/STD	Hardwire Box	6.5 (165)	50

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
Data is based upon tests performed in a controlled environment.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



STANPRO
LED SWIVEL - 67196

COMPATIBLE DIMMERS

Brand	Model
LEGRAND	PD-5NE
LUTRON	DVCL-153P, MACL-153P
LEVITON	IPL06, IPE04-1LZ


Dimming range: 5%-100%

NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.



995 Milt Stegall Drive
Winnipeg MB R3G 3H7
Alison Demare
alisond@robinsonlighting.com
204-784-0099


DIMENSIONS

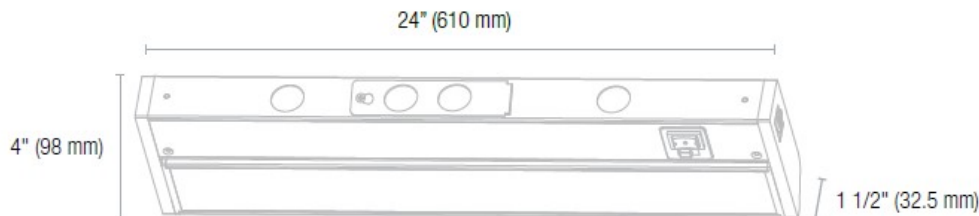

PHOTOMETRIC DATA¹

67196 • UCS/24IN/120V/12W/SEL/FR/WH/STD • 12 W • 904.4 lm

Polar candela distribution

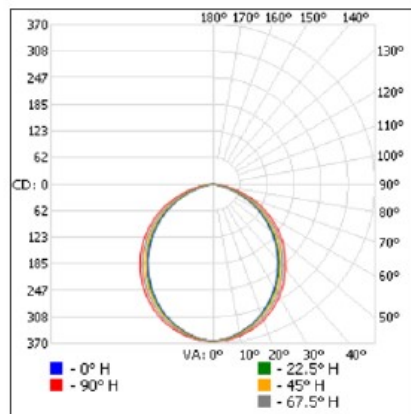

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	272.7	30.2
0-40	439.1	48.6
0-60	749.0	82.8
60-90	155.4	17.2
0-90	904.4	100

Illuminance at a distance

Center beam fc		Beam width	
1.7'	126	3.9'	4.8'
3.3'	33.6	7.6'	9.2'
5.0'	14.6	11.5'	14.0'
6.7'	8.14	15.4'	18.8'
8.3'	5.31	19.0'	23.2'
10.0'	3.66	22.9'	28.0'



Vert. spread: 97.8°
Horiz. spread: 108.9°

¹ Complete IES files available on our website.



Prepared For:

Job Name:

Type: Suite Dining Table

Quantity:

MONDRIAN LP16236

PENDANTS

PROJECT



DESCRIPTION

Mondrian series is composed from numerous rectilinear frames of light. The illuminated borders surrounding an open central void create an illusion of levitation. The airy design and negative space allow the fixture to visually blend into the environment. High-quality finish and simple forms coalesce in the elegant new product.



LP16236-BN
Brushed Nickel




LP16236-BK
Black

SPECIFICATION DETAILS

* For custom options, consult factory for details.

Fixture Dimensions	L35-1/2" x W8-3/4" x H6-3/4"
Light Source	LED with DC Driver
Total Lumens	4845lm
Wattage	60W
Delivered Lumens	2000lm*
Voltage	120V
Color Temperature	3000K
CRI (Ra)	90CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Diffuser Details	Frosted acrylic diffuser
Dimming	100% - 10%, TRIAC or ELV Dimmer (Not Included)
Adjustable	Yes
Wire Length	120" Max
Minimum Hang Height	10"
Wire Type	BK - Black SSL Wire; BN - Clear SSL Wire;
Location	Dry
Warranty	5 Years
Canopy Dimensions	L11-7/8" x W9-7/8" x H1-5/8"

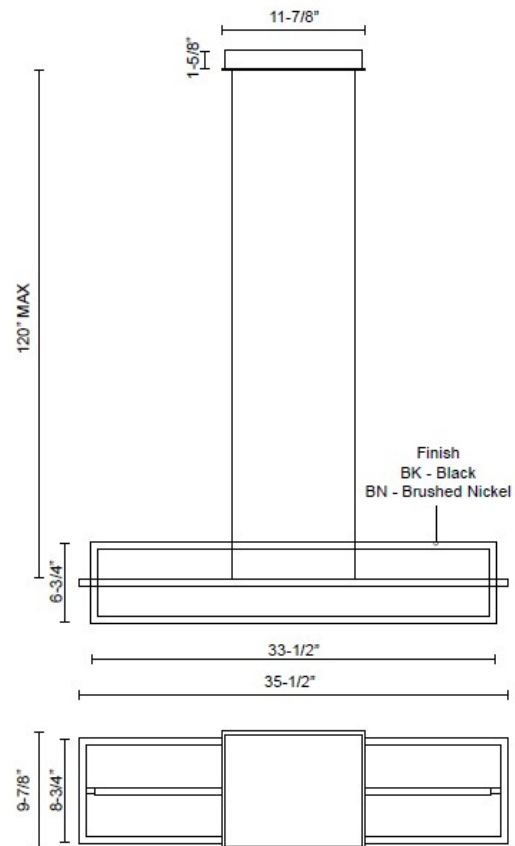

995 Milt Stegall Drive
Winnipeg MB R3G 3H7
Alison Demare
alisond@robinsonlighting.com
204-784-0099


**DALS
LIGHTING**
Canada
80, de la Seigneurie blvd., E.
Blainville, Quebec J7C 4N1

U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065

877.430.1818
info@dals.com
dals.com

MODEL **5006-CC**
NAME **EXCEL**
6-Inch Recessed Panel Light

Our LED panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.


PROJECT:

TYPE:

DATE:


QTY:

NOTES:

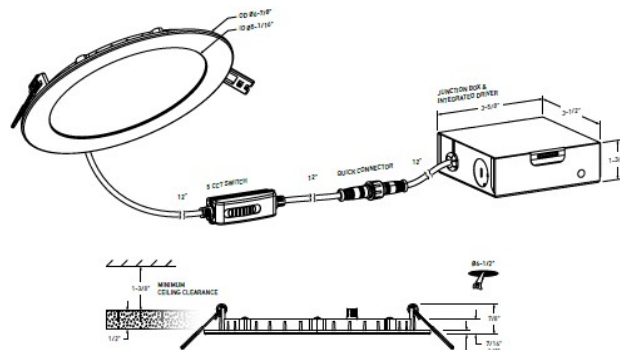
995 Milt Stegall Drive
Winnipeg MB R3G 3H7
Alison Demare
alisond@robinsonlighting.com
204-784-0099

QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	FINISH
6"	14W	1100lm	2700K 3000K 3500K 4000K 5000K	80	120V	110°	☐ White ☒ Black

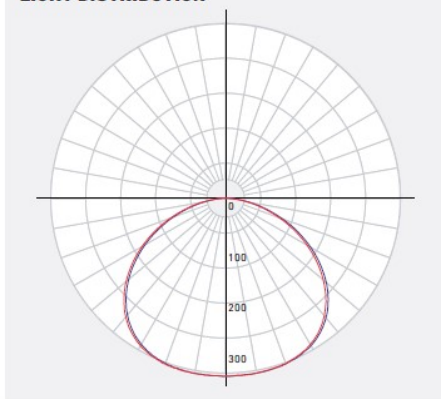*Lumen output measured at 3000K

LIGHT DISTRIBUTION

CONSTRUCTION
Lens
Frosted

Type of optics
Flat lens

Type of LED
Edge-lit SMD

Lens material
Acrylic

Housing material
Cast aluminum

Cut hole size
6-1/4"

RATINGS
Placement
Indoor/Outdoor

Lifespan
35,000 hrs.

FT rating
FT4

Location
Wet

Certifications
ETL, FCC, ICES, ES
IC, ASTM E283-04, T24

Operating temperature
-20° to 40° C

WHAT'S IN THE BOX

LED recessed fixture
Junction box
Push-in wire connectors
Mounting hardware
Instruction sheet

COMPATIBLE ACCESSORIES
RFP-UNI
Universal Drilling Plate For 2", 3", 4" and 6" fixtures

RFP-46
Drilling plate for 4" and 6" fixtures

COMPATIBLE ADAPTERS
REC-EXT108
108" extension cord for recessed fixtures

REC-EXT230
230" extension cord for recessed fixtures



Prepared For:

Job Name:

Type: Suite Balony Pot Lights

Page 2 of 2

Quantity:



Canada

80, de la Seigneurie blvd., E.
Blainville, Quebec J7C 4N1

U.S.A.

4383, NW 124th Ave.,
Coral Springs, Florida 33065

877.430.1818

info@dals.com

dals.com

ELECTRICAL
DETAILS

Input voltage

108-132V

Output current

320mA

Power factor

99%

Driver type

Constant current

Output voltage

36V

LED model

2835

THD harmonic

distortion

<30%

Binning type

3 SDCM

FEATURES

Every fixture includes
a junction box with an
integrated driverSuperior LED
performance and
lifespan

Minimal heat emission

Very low profile

Can be daisy chained

Smooth 360° wide
spread

Frosted lens

Edge lit technology

Switch-selectable CCT:
2700K/ 3000 K/ 3500 K/
4000 K/ 5000 K

WARRANTY

DALS offers a 5-year warranty from the date of purchase which
covers repairs or replacement of defective parts of the housing,
optics, and electronics. To contact DALS customer service call
1-877-430-1818 or send an e-mail to info@dals.com.995 Milt Stegall Drive
Winnipeg MB R3G 3H7
Alison Demare
alisond@robinsonlighting.com
204-784-0099

RECOMMENDED DIMMER LIST*

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)	MAX LOAD
Dals	SM-DIMSW Smart Dimmer	Triac, 250W LED/CFL	Compatible	Min: 7 / Max: 100	10
Lutron	DVCL-153PR-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 8 / Max: 100	10
Lutron	CTCL-153PDH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 7 / Max: 100	10
Lutron	STCL-153PH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 1 / Max: 100	10
Lutron	DVWCL-153PH-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 7 / Max: 100	10
Lutron	MACL-153MRHW-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 2 / Max: 100	10
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	Min: 9 / Max: 100	21
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	Min: 2 / Max: 100	17
Lutron	Caseta PD-6WCL-WH-R-C	Triac, 300W Dimmable CFL/LED	Compatible	Min: 5 / Max: 100	21
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	Min: 4 / Max: 100	17
Lutron	Caseta PD-10NXD-WH	Triac, LED—up to 250 W	Compatible	Min: 1 / Max: 100	17
Leviton	6672-1LW	Triac, 150W Dimmable CFL/LED	Compatible	Min: 22 / Max: 100	10
Leviton	DSM10	Triac, 450W Dimmable CFL/LED	Compatible	Min: 19 / Max: 100	32
Leviton	6674	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 11 / Max: 100	10
Leviton	IPL06-10Z	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 18 / Max: 100	10
Leviton	DSL06-752	Triac, 150 W Dimmable CFL/LED	Compatible	Min: 17 / Max: 100	10
Leviton	D26HD-742-1RW	Triac, 300W LED/CFL	Compatible	Min: 11 / Max: 100	21
Legrand	RHCL453PNICCV4	Triac, 450W Dimmable CFL/LED	Compatible	Min: 12 / Max: 100	32
Legrand	ADTP703TUM4	Triac, 450W Dimmable CFL/LED	Compatible	Min: 12 / Max: 100	32
Legrand	ADPD453LM2	Triac, 450W Dimmable CFL/LED	Compatible	Min: 39 / Max: 100	32
Legrand	RHL373PW	Triac, 250W LED	Compatible	Min: 9 / Max: 100	17
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	Min: 0 / Max: 100	8



Prepared For:

Job Name:

Type: Suite Balony Wall Lights

Quantity:

BRECON OUTDOOR

SKU | DVP43071

DVI
LIGHTING

CATEGORY: Outdoor Sconce

DIMENSIONS

Length / Ø: 4.75"

Width: N/A"

Height: 19.75"

Depth: 5.25"

Minimum Height: 21.25"

Maximum Height: 21.25"

LAMPING

Number of Sockets: 2

Wattage of Individual Socket: 25

Socket Type: GU10

Bulbs Included: No

Orientation of Light Source: Up and Down

Lamp Confinement: Fully Enclosed

Voltage: 120

Dimmable: Yes

FINISH OPTIONS

Stainless Steel and Black



WARRANTY

5 Years Residential

20,000 Hours Commercial

PIPE / CHAIN INFORMATION

Pipe/Chain Kit Available: No


ADDITIONAL INFORMATION

Location Certification: Wet Location Certified

Maximum Slope Ceiling Angle: 0

ADA Compliant: No

Wall and Ceiling Mountable: No

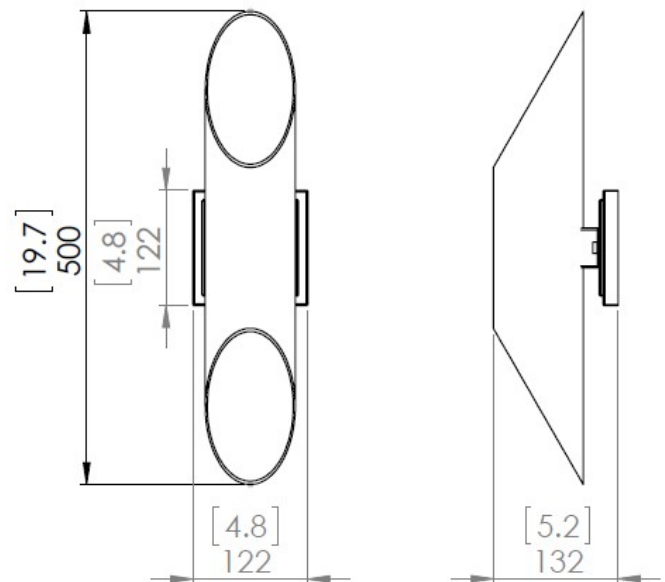

995 Milt Stegall Drive
Winnipeg MB R3G 3H7
Alison Demare
alisond@robinsonlighting.com
204-784-0099

LED FIXTURE

RIGID Series



LED Surface Discus RGD-HS

Slim design, Multi-Kelvin (CCT)



5-year limited warranty

Operating temperature range -20 °C ~ +40 °C




995 Milt Stegall Drive
Winnipeg MB R3G 3H7
Alison Demare
alisond@robinsonlighting.com
204-784-0099

Features & Benefits

cETLus listed, Energy Star
Mounts directly to J-box or retrofit 4", 5", 6" downlight
TRIAC dimmable down to 10%
Beam angle 120°
Finish color white (interchangeable trim ring for matte black or satin nickel finish)
L70 @ 50,000 Hrs, CRI ≥80
Damp location rated

Dimensional Drawing

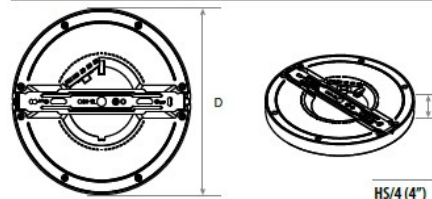

	M.O.D.	M.O.H.
HS/4 (4")	5 1/2"	0.61"
HS/6 (6")	6 1/2"	0.59"
HS/8 (8")	8 1/2"	0.59"
HS/11 (11")	11 1/2"	0.61"
HS/16 (16")	15 3/4"	0.95"
HS/24 (24")	23 5/8"	1.00"

Ordering Information Example: RGD-HS/4/6W/MULTI-K/WH/D

Family Name	Fixture Type	Size	Wattage	CCT	Finish	Dimmable	Options
RGD (Rigid)	HS (Surface discus)	4 (4"), 6 (6"), 8 (8"), 11 (11"), 16 (16"), 24 (24")	6W, 12W, 18W, 24W, 30W, 48W	MULTI-K (Multi-Kelvin) 30K (3000K)	WH (White)	D (Dimmable)	Matte black trim ring Satin nickel trim ring (Sold separately)

Product Specification

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Beam Angle	Damp Location	Dimmable	Dimension D×H (Inch)	Case QTY.
3662144	Yes	RGD-HS/4/6W/MULTI-K/WH/D	6	120	50,000	420	30/40/50	≥80	120°	Yes	Y	5 1/2" × 0.61"	60
3662161	-	RGD-HS/4/6W/30K/WH/D	6	120	50,000	420	3000	≥80	120°	Yes	Y	5 1/2" × 0.61"	60
3662145	Yes	RGD-HS/6/12W/MULTI-K/WH/D	12	120	50,000	840	30/40/50	≥80	120°	Yes	Y	6 1/2" × 0.59"	40
3662162	-	RGD-HS/6/12W/30K/WH/D	12	120	50,000	840	3000	≥80	120°	Yes	Y	6 1/2" × 0.59"	40
3663130	-	RGD-HS/8/18W/30K/WH/D	18	120	50,000	1260	3000	≥80	120°	Yes	Y	8 1/2" × 0.59"	20
3663127	Yes	RGD-HS/8/18W/MULTI-K/WH/D	18	120	50,000	1260	30/40/50	≥80	120°	Yes	Y	8 1/2" × 0.59"	20
3664134	Yes	RGD-HS/11/24W/MULTI-K/WH/D	24	120	50,000	1920	30/40/50	≥80	120°	Yes	Y	11 1/2" × 0.61"	10
3664151	Yes	RGD-HS/11/24W/30K/WH/D	24	120	50,000	1920	3000	≥80	120°	Yes	Y	11 1/2" × 0.61"	10
3664159	Yes	RGD-HS/16/30W/30K/WH/D*	30	120	50,000	2200	3000	≥80	120°	Yes	Y	15 3/4" × 0.95"	10
3665174	Yes	RGD-HS/24/48W/30K/WH/D*	48	120	50,000	3290	3000	≥80	120°	Yes	Y	23 5/8" × 1.00"	5

Fixture types 4", 6", 8" & 11" come with embedded magnets to allow for optional trim selection mounting.
* Types 16" & 24" optional trim selection not available.

LED Surface Discus RGD-HS

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Beam Angle	Damp Location	Dimmable	Dimension D×H (Inch)	Case QTY.
3660112	-	RGD-HS/4/SN	Satin nickel metal trim for HS/4, (Dia. 141.0mm, Height 15.6mm)										
3660113	-	RGD-HS/4/MB	Matt black metal trim for HS/4, (Dia. 141.0mm, Height 15.6mm)										
3660114	-	RGD-HS/6/SN	Satin nickel metal trim for HS/6, (Dia. 166.2mm, Height 15.6mm)										
3660115	-	RGD-HS/6/MB	Matt black metal trim for HS/6, (Dia. 166.2mm, Height 15.6mm)										
3660116	-	RGD-HS/8/SN	Satin nickel metal trim for HS/8, (Dia. 218.8mm, Height 15.6mm)										
3660117	-	RGD-HS/8/MB	Matt black metal trim for HS/8, (Dia. 218.8mm, Height 15.6mm)										
3660118	-	RGD-HS/11/SN	Satin nickel metal trim for HS/11, (Dia. 293.6mm, Height 15.6mm)										
3660119	-	RGD-HS/11/MB	Matt black metal trim for HS/11, (Dia. 293.6mm, Height 15.6mm)										
3660120	-	RGD-HS/4/TC/KIT	Tension clip for HS/4, includes 1pc E26 adaptor, 2 clips to fit 4" housing										
3660121	-	RGD-HS/6/TC/KIT	Tension clip for HS/6/8/11, includes 1pc E26 adaptor, 2 clips fit 5/6" housing										



995 Milt Stegall Drive
 Winnipeg MB R3G 3H7
 Alison Demare
 alisond@robinsonlighting.com
 204-784-0099