



TA6032L/R Soaker
TAS6032L/RAW Whirlpool

Size: 60" x 32" x 20"
1524 mm x 813 mm x 508 mm

* Left or Right is determined by plumbing

PRODUCT FEATURES & BENEFITS



Soaker

- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Built in 1" tile flange on 3 sides
- Removable front access panel on all hydrotherapy models
- Above floor rough in
- Patterned bottom



Whirlpool System

- 3/4 HP pre-wired self draining pump and motor factory installed on a platform base
- 6 adjustable flow whirlpool jets, 2 foot jets
- Deck mounted air switch (A/S)



Optional Accessory

- Colour coordinated jets standard; polished chrome or brushed nickel available as an upgrade
- Factory installed whirlpool heater
- Door(s) - Refer to price book / website for coordinating shower door options

GENERAL SPECIFICATIONS

Average Weight	Soaker	70 lb	32 kg
	Whirlpool	105 lb	48 kg
Bathing Well at bottom	21 1/2" x 45 1/2"	546 mm x 1156 mm	
Capacity Drain to Overflow			218 litres
Min. operating capacity			164 litres
Water Depth Drain to Overflow	13"		330 mm
Drain Opening (dia.)	2"		51 mm
Overflow Opening (dia.)	2 1/2"		64 mm
Drain to Floor Clearance	3"		76 mm


ELECTRICAL SPECIFICATIONS

Whirlpool pump / motor 3/4HP, 7.5 AMP, 120V

Compliance Certifications -

Meets or Exceeds the following Specifications:

- CAN/CSA - B45 Series
- CAN/SCA - Hydromassage Standard

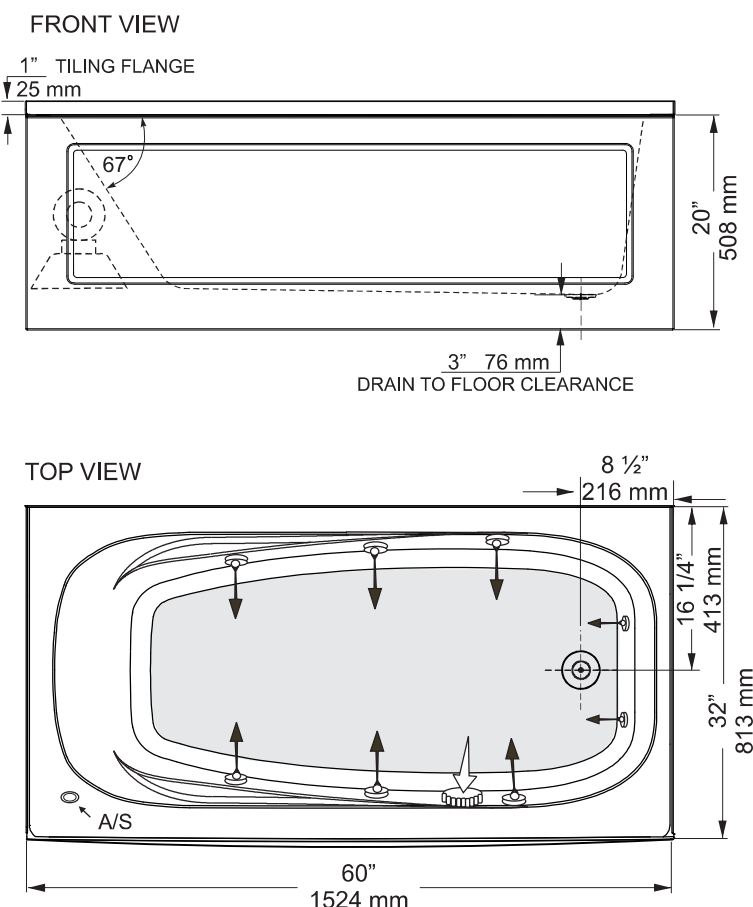

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by the 4 feet and 2 runners. Shim if required to level the bathtub for adequate drainage.

Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary $\pm 1/4$ " (6 mm). Weight may vary ± 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.